


Bolt feeder

BOLT FEEDER AUTOMATIC • LOW NOISE

- Feeding capacity: up to 30 bolts per minute.
- Single or dual feeding..
- Top cover for low noise and high protection.
- Control cabinet allow future upgrades.
- CE safety Norms.

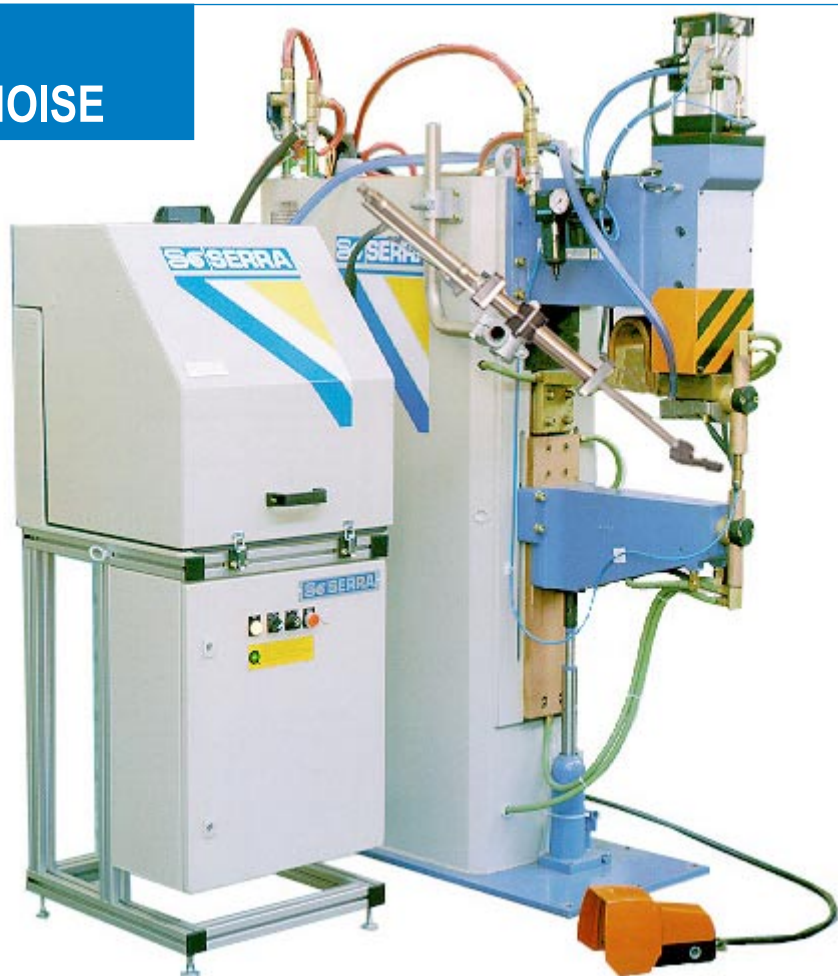

TECHNICAL FEATURES

SINGLE FEED

DUALFEED

Power supply / Frequency	400 Vac / 50-60Hz	
Operating power	24 Vdc	
Consumption	300 VA	350 VA
Feeding capacity (bolts per minute)	26 to 29	24 to 30
Cycle time	2 s	4 s
Hopper capacity	10 litres	
Nominal air pressure	6 bar	
Feeding head stroke / mounting angle	156 mm / 30°	
Bolt impeler / selector	10 bar	
Bolt transport (to feeding head/ centering device)	Pneumatic / Mechanic	
Noise level	72 db	
External dimensions (H x W x L)	1400 x 507 x 560 mm	
Weight (Without feeding head / feeding head)	144,5 / 8,5 kg	149,5 / 8,5(x2) kg
Feeding head interconnection length	3000 mm	3000 (x2) mm
Feeding head length	750 mm	750 (x2) mm



Dedicated feeders under request



P. I. Zona Franca, Sector C, Calle D, nº 29. E-08040 BARCELONA



Tel. (34) 93.26.17.100 Fax (34) 93.26.17.110 www.serrasold.com